

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 820 002 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:

**21.01.1998 Bulletin 1998/04**(51) Int Cl.<sup>6</sup>: **G06F 3/033**(21) Application number: **97304748.3**(22) Date of filing: **01.07.1997**


(84) Designated Contracting States:

**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**

Designated Extension States:

**AL LT LV RO SI**(30) Priority: **17.07.1996 US 685899**(71) Applicant: **INTERNATIONAL BUSINESS****MACHINES CORPORATION****Armonk, NY 10504 (US)**(72) Inventor: **Santos-Gomez, Lucinio****Durham NC 27713 (US)**(74) Representative: **Zerbi, Guido Maria****Intellectual Property Department,****IBM United Kingdom Ltd.,****Hursley Park****Winchester, Hampshire SO21 2JN (GB)**(54) **Multi-pane window with reconfiguring workspaces**

(57) Methods, data processing systems or program products which provide user interfaces including a window having a workspace and a first set of non-overlapping resizeable panes comprising a plurality of non-overlapping resizeable panes within the workspace. The non-overlapping resizeable panes occupy substantially the entirety of said workspace. Open or closing pane creates a second set of panes in the window. In the opening case, the second set of panes include the first set of panes and a new pane in non-overlapping relationship without requiring resizing of the new pane or the first set of panes by the user. In the closing case, the second set of panes include the remaining panes of the first set of panes which occupy substantially the entirety of the workspace in non-overlapping relationship without requiring resizing of the new pane or the first set of panes by the user. Selectable contents may also be provided and are contained within at least one of the non-overlapping resizeable panes which includes at least one option icon of user selectable options. Selecting an option icon causes the contents of the non-overlapping resizeable pane to be replaced by contents associated with the selected option icon.

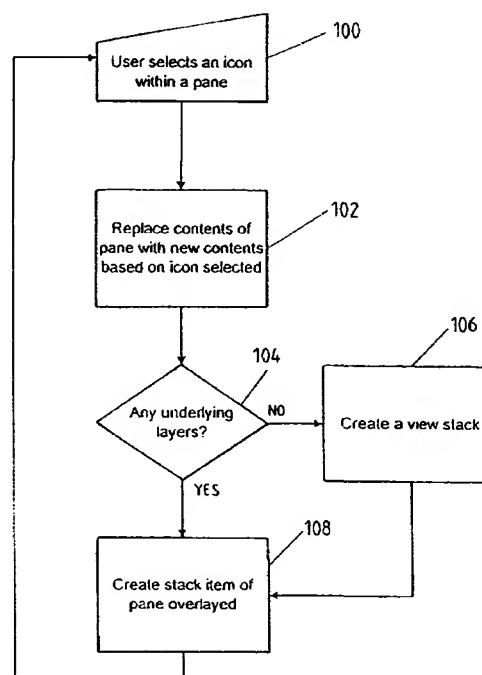**FIG. 8****EP 0 820 002 A1**

## Description

### Field of the Invention

The present invention relates generally to user interfaces for computer systems. More particularly, the present invention relates to multiple workspaces in a user interface environment for a computer system.

### Background of the Invention

Increases in processing capability and decreases in the cost of personal computers has led to the proliferation of personal computers in all aspects of society. Personal computers are utilized in schools, homes and in business. Furthermore, with the decreased costs of personal computers, it has become more feasible from a cost perspective to use computers for tasks, and to carry out functions, which were previously done without the use of computers.

With the proliferation of computers throughout numerous aspects of life has come a trend to graphic user interfaces which make using a computer more intuitive. Examples of such graphic user interfaces include IBM OS/2<sup>1</sup>, Apple System 7<sup>2</sup>, and Microsoft windows<sup>3</sup>. These operating systems all rely on a "window like" workspace for applications, operating system information, such as directory information, and program groupings. Multiple windows may be displayed on the screen of a computer display device simultaneously in what is often referred to as a "desktop." Windows within a desktop are defined by a border which surrounds the window and may also include a title bar and in some cases a series of menu choices which may manage the appearance and contents of the window. In combination with a pointing device, windows may be independently moved and resized by "dragging" a border to a new location. Resizing a window may also be accomplished by dragging the corner of a window which simultaneously resizes the window in two directions.

Multiple windows on a desktop may be displayed in two primary ways. Windows may overlap each other and obscure windows beneath the topmost window in what is often referred to as a "cascade" or windows may be "tiled" across the screen so that the windows do not overlap. However, the tile method of displaying windows has previously been utilized primarily as a user selected option after creation of cascaded overlapping windows, in for example, Windows and Windows applications such as WordPerfect<sup>4</sup> for Windows. In either the cascade case or the tile case, the creation or destruction of windows does not affect the sizing of existing windows on the screen. Furthermore, windows may be independently moved about the screen to relocate the window on

the desktop.

To the best of the inventor's present knowledge, present user interfaces only allow independently sized and positioned windows or windows which bear a fixed relationship between each other. Thus, as a user opens new windows the older windows may be overlapped and obscured. When the user resizes one window the remaining windows open on the desktop are not resized and the user may resize each window individually to correct for overlap of multiple windows that the user desires to be visible.

Alternatively, to the best of the inventor's present knowledge, as a user opens an application, such as Windows Explorer, which has a fixed number of resizable subdivisions in the application window, the size of each subdivision is specified by the application. Furthermore, the number of subdivisions of the window is constant in that, for example, only two subdivisions of the window are present. Finally, these subdivisions are permanently connected so that they are in a fixed relationship with each other. Thus, a degree of flexibility of the user interface is sacrificed when the application has resizable subdivisions of its window.

As a result of the increased complexity and the multi-tasking or multi-thread capabilities of modern graphic interface operating systems such as OS/2, it has become more and more likely that multiple windows will be open on the desktop simultaneously. With ever increasing size and resolution capabilities of display devices for computers it becomes more likely that a meaningful presentation of multiple windows is possible. Also, window based operating systems such as Windows 95 and Apple System 7 display disk information within windows. Thus, to navigate a directory structure to locate a desired file a window is opened for each directory in the path to the file. These windows provide useful information only for a short period of time until the next level in the path is opened but remain displayed on the screen until closed by the user. Thus, often the screen becomes quickly cluttered with windows which contain information which is no longer needed.

As these examples illustrate, as the number of windows on a desktop increases there is an increased likelihood that a window containing information the user desires to be displayed is obscured. Thus, the increase in the use of multiple window applications and windowing operating systems has resulted in the proliferation of windows on a user's desktop which often clutters and obscures the useful information the user desires.

When these limitations of user interfaces are combined with the proliferation of windows on a desktop, the user is often required to resize each window individually to correct for overlap of multiple windows that the user desires to be visible or to perpetually close unneeded windows. Accordingly, in view of the above, it is apparent that the increase in use of graphical user interfaces and the increased capabilities of computer has brought about a need for improvements in the manipulation of

<sup>1</sup>OS/2 is a trademark of International Business Machines Corporation

<sup>2</sup>System 7 is a trademark of Apple Inc.

<sup>3</sup>Windows is a trade mark of Microsoft Corporation

<sup>4</sup>WordPerfect is a trade mark of Corel Corp.

windows in these user environments.

### Objects and Summary of the Invention

It is an object of the present invention to provide a technique which alleviates the above drawbacks.

According to the present invention we provide a user interface for a data processing system, the user interface comprising: a window having a workspace; a first set of non-overlapping resizable panes comprising a plurality of non-overlapping resizable panes within said workspace of said window wherein said non-overlapping resizable panes occupy substantially the entirety of said workspace; and means responsive to a user input to open a new pane, for creating a second set of panes in said window, said second set of panes comprising said first set of panes and said new pane in non-overlapping relationship without requiring resizing of said new pane or said first set of panes by the user.

Further according to the present invention we provide a computer-readable storage medium having computer-readable program code means embodied in said medium, said computer-readable program code means comprising: computer readable program code means for providing a window having a workspace; computer readable program code means for providing a first set of non-overlapping resizable panes comprising a plurality of non-overlapping resizable panes within said workspace of said window wherein said non-overlapping resizable panes occupy substantially the entirety of said workspace; and computer readable program code means responsive to a user input to open a new pane, for creating a second set of panes in said window, said second set of panes comprising said first set of panes and said new pane in non-overlapping relationship without requiring resizing of said new pane or said first set of panes by the user.

Also according to the present invention we provide a method of providing a user interface for a data processing system, the method comprising the steps of: providing a window having a workspace; providing a first set of non-overlapping resizable panes comprising a plurality of non-overlapping resizable panes within said workspace of said window wherein said non-overlapping resizable panes occupy substantially the entirety of said workspace; obtaining user input indicating that a new pane is to be opened; and creating a second set of panes in said window based on said user input, said second set of panes comprising said first set of panes and said new pane in non-overlapping relationship without requiring resizing of said new pane or said first set of panes by a user.

According to an embodiment of the present invention the user interfaces include a window having a and a first set of non-overlapping resizable panes comprising a plurality of non-overlapping resizable panes within the workspace. The non-overlapping resizable panes occupy substantially the entirety of said work-

space. Also included are means, responsive to a user input to open a new pane, for creating a second set of panes in the window. The second set of panes include the first set of panes and a new pane in non-overlapping relationship without requiring resizing of the new pane or the first set of panes by the user.

In a further embodiment of the present inventions, a user interface is provided with means responsive to a user input to close a selected one of the first set of panes. A third set of panes is created which includes the non-selected panes of the first set of panes in non-overlapping relationship without requiring resizing of the non-selected panes of the first set of panes by the user. This third set of panes occupies substantially the entirety of the workspace.

Thus a user can create/expose a pane or workspace without overlapping existing panes and without requiring input from the user to resize the existing panes. Furthermore, the user may close or hide panes or workspaces while still utilizing substantially all of the available workspace. This automatic resizing of panes reduces the amount of user input required to manage the presentation of information in the user interface and, thus, can reduce the clutter of the user interface.

In another aspect of the present invention, user interfaces include means for creating a second window having a workspace. Also included are means for selecting one of the plurality of non-overlapping resizable panes and for placing the contents which correspond to the selected one of the plurality of non-overlapping resizable panes in the second window.

In yet another aspect of the present invention, user interfaces include means associated with a plurality of non-overlapping resizable panes for selecting one of the plurality of non-overlapping resizable panes and means for dragging the selected one of the plurality of non-overlapping resizable panes to outside the first window. Finally, the user interface includes means for creating a second window having a workspace the contents of which correspond to the selected and dragged one of the plurality of non-overlapping resizable panes.

The ability to create a new window separate from the commonly resized panes but containing the contents of a pane, either by dragging and dropping a pane or otherwise, provides the user with the flexibility to maintain fixed size for a workspace without losing the benefits of the commonly sized panes. Thus, a user has available at their discretion the benefits of overlapping windows for some information and for commonly sized windows for other information. This flexibility allows the user to tailor the user interface to their specific needs while still reducing desktop clutter and reducing the likelihood that information will be obscured by window proliferation.

In another embodiment of the present invention, resizing of one of the plurality of resizable panes causes resizing of other of the resizable panes.

In still another embodiment of the present invention,

user interfaces for a data processing system are provided which include a window having a workspace and a plurality of non-overlapping resizeable panes within the workspace of the window. Selectable contents are provided and are contained within at least one of the non-overlapping resizeable panes which includes at least one option icon of user selectable options. Selecting an option icon causes the contents of the non-overlapping resizeable pane to be replaced by contents associated with the selected option icon.

In a further embodiment of the present inventions, the user interface includes a view stack associated with one of the non-overlapping resizeable panes the contents of which has been replaced. The view stack has a view icon associated with the replaced contents of the associated non-overlapping resizeable pane such that selection of the view icon causes the contents of the associated non-overlapping resizeable pane to be replaced by the contents associated with the selected view icon.

By replacing the contents of a pane with the contents associated with the selected icon, the proliferation of windows may be reduced. A user will not be presented with an ever increasing number of windows of old and less relevant information but will have the most relevant information displayed most prominently in the workspace. Furthermore, with the inclusion of a view stack the user may readily move between contents of a pane to access the underlying information. These aspects of the present invention may substantially reduce window proliferation and allow a user to focus on the most relevant information without rearranging a desktop and without having to close out of data windows.

In another embodiment of the present inventions, the plurality of resizeable panes contain related information. Selection of the selectable contents of one of the plurality of resizeable panes causes contents of one other of the plurality of resizeable panes to be revised.

As will be appreciated by those of skill in this art, the above described aspects of the present inventions may also be provided as method, data processing systems or computer program products.

#### Brief Description of the Drawings

**Figure 1** is a logical diagram of a system utilizing the present invention;

**Figure 2** is a diagram of a screen utilizing the present invention having three panes;

**Figure 3** is a diagram of the screen of **Figure 2** with an additional pane opened by user input;

**Figure 4** is a diagram of a screen according to the present invention having icons for user selection;

**Figure 5** is a diagram of the window of **Figure 4**

after selection of a user selectable option icon;

**Figure 6** is a diagram of screen of **Figure 5** after a pane is dragged to a new window;

**Figure 7** is a flowchart of one embodiment of the present invention; and

**Figure 8** is a flowchart of another embodiment of the present invention.

#### Detailed Description

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

As will be appreciated by one of skill in the art, the present invention may be embodied as a method, data processing system or program product. Accordingly, the present invention may take the form of an entirely hardware embodiment, an entirely software embodiment or an embodiment combining software and hardware aspects. Furthermore, the present invention may take the form of a computer program product on a computer-readable storage medium having computer-readable program code means embodied in the medium. Any suitable computer readable medium may be utilized including hard disks, CD-ROMs, optical storage devices, or magnetic storage devices.

**Figure 1** illustrates a data processing system on which user interfaces according to the present invention may be utilized. As seen in **Figure 1**, a data processor **20** may have an operating system **21** resident in the processor **20**. An application **22** may be running on the operating system **21**. The processor **20** displays information on a display device **23**. The display device **23** has a plurality of picture elements (collectively referred to as a screen) which may define the appearance of a user interface environment displayed on the display device **23**. The contents of the screen of the display device **23** and, therefore, the appearance of the user interface environment, may be controlled or altered by the application **22** or the operating system **21** either individually or in combination.

For obtaining input from a user, the operating system **21**, the application **22** or both may utilize user input devices **24**. User input devices **24** may include a pointing device **25** and a keyboard **26** or other input devices known to those of skill in the art. User input devices **24** may be used to designate areas of the screen or locations on the screen such as the border of a workspace

or the corner of the borders of the workspace. Furthermore, once designated, the user interface may display a separate icon to indicate that selection of that location of the screen may translate the feature of the workspace or the workspace itself to a different location on the screen.

**Figures 2 and 3** illustrate one embodiment of the present invention which utilizes automatically resized panes. As seen in **Figure 2** a screen **30**, which may be displayed on display device **23**, has a window **32** having a workspace **33**. **Figure 2** illustrates a first set of non-overlapping resizeable panes **34**, **36** and **38**. This plurality of non-overlapping resizeable panes is contained within the workspace **33** of window **32** and occupy substantially the entirety of the workspace.

User input received from user input devices **24**, may create or open a new pane, uncover or expose a minimized or existing pane or close or hide an existing pane. **Figure 3** illustrates the creation of a new pane. As discussed below, this operation on a pane may be accomplished by a single user input of a check box or other fast path to manipulation of a pane within a window. As seen in **Figure 3**, user input has instructed the processor **20** to open a new pane. Thus a second set of panes **34**, **36**, **38** and **39** in window **32** is created. This second set of panes includes the first set of panes **34**, **36** and **38** and the new pane **39** in non-overlapping relationship with each other and without requiring resizing of the new pane **39** or the first set of panes **34**, **36**, and **38** by the user.

The reverse operation of closing a pane within the workspace **33** may also be carried out based on user input. In the reverse case, user input from the user input devices **24** selects one of a set of panes. The selected pane is closed and a set of panes comprising the non-selected panes is created. This new set of panes is created such that the remaining panes are in non-overlapping relationship without requiring resizing by the user. The resized non-selected panes occupy substantially the entirety of the workspace **33**. Thus, if the first set of panes is illustrated in **Figure 3**, **Figure 2** may illustrate the resized panes after one of the panes of **Figure 3** is closed.

Another aspect of the present invention is illustrated in **Figures 4 and 5**. **Figure 4** and **Figure 5** illustrate windows within a screen. As seen in **Figure 4**, a plurality of icons are provided as contents of a pane. Pane **40** contained within the workspace **33** of window **32** has four icons **42**, **44**, **46** and **48**. These icons may represent any number of user selectable options, such as, for example, applications, directories, folders or files in a directory structure. As will be appreciated by those of skill in the art, while the present invention is described with respect to icons in a graphical user interface, any number of methods of identifying user selectable options may be employed while still benefitting from the teachings of the present inventions. The icons **42**, **44**, **46** and **48** are contained within pane **40** which also has a title bar **50**

with a title **54** which may be utilized to identify the grouping of icons. The pane **40** may also have means for deactivating, hiding or closing the pane such as is illustrated by the check box **52**. Check box **52** allows for a single user input to manipulate the visibility of the pane through either hiding or closing the pane.

By selection of a user selectable option, such as with pointing device icon **56**, the user activates a user selectable option which replaces the contents of a pane, such as pane **40**, with contents based upon the user selected option. Accordingly, as illustrated in **Figure 5**, selection of the "Recovery" icon **44** has replaced the contents of pane **40** with the Recovery application user interface. As seen in **Figure 5**, the title bar **50** of pane **40** now has a title **58** which indicates the "Recovery" application occupies pane **40**. Also, the menu bar **62** and a button bar **64** have been included in pane **40** as part of the "Recovery" user interface. Finally, a dialogue box **60** for the "Recovery" application is illustrated in pane **40** to indicate that the contents of pane **40** is now controlled by the "Recovery" application.

In addition to replacing the contents of pane **40** with the recovery application, **Figure 5** illustrates the creation of a view stack **66** which contains a view icon **68**. The view stack **66** indicates the contents of pane **40** which have been replaced by selection of a user selectable option. The view icon **68** is associated with the replaced contents such that selection of the view icon **68** would cause the contents of pane **40** to revert to the "Tools" view of **Figure 4**. As will be appreciated by those of skill in the art, the view stack **66** may contain icons or any other type of indicia from which a user may select previous contents of a pane. Furthermore, any number of previous panes may be reflected in the view stack such that a plurality of icons may be contained in the stack with each icon associated with previous contents of the pane. Optionally, deactivation of a pane by the user selectable check box **52** or its equivalent may remove from the view stack any icon associated with the deactivated contents of the pane. Thus, selection of a user selectable option provides the desired results of that selection to the user without a proliferation of windows. Furthermore, any contents in the path to the top-most contents of the pane are also available to the user in a single operation and may be selectively removed from the stack of views to further reduce the complication and clutter of the interface.

**Figure 6** illustrates a further embodiment of the present invention. As seen in **Figure 6**, the contents of pane **40** from **Figure 5** have been removed from window **30** and a new window **80** has been created with the workspace **83** of window **80** containing the contents of pane **40** from **Figure 5**. Thus, the new window **80** has a title bar **82** with a title **84** indicating that the "Recovery" application controls the contents of the workspace **83** of window **80**. Furthermore, the menu bar **62**, button bar **64** and dialogue box **56** are now removed from pane **40** and reside in window **80**. Also, pane **40** has reverted to

the underlying contents of **Figure 4**. Optionally, transfer of the contents of a pane to a new, stand-alone, window may simply close the pane in the original window. Furthermore, if there are no underlying contents of the pane, the pane could also close when the contents are transferred to a new window. Thus, the user may simultaneously display the contents of multiple windows selectively without the proliferation of every window in the path to the desired contents.

New window **80** may be created by selecting the contents of pane **40** by user input, such as with a pointing device, and then "dragging" the contents of pane **40** to outside window **32** on screen **30**. This operation creates a new window in a single user operation. As will be appreciated by those of skill in the art, any number of methods of selecting a pane and creating a new window with the contents of the selected pane may be utilized, including, for example, keyboard input, pointing device input or a combination of the two input methods.

In a further aspect of the present invention, the contents of the panes of a window contain related information or related user selectable options. Accordingly, selection of a user selectable option in one pane may cause the contents of a related pane to also change. Furthermore, it is desirable that the panes within a window be resizeable with minimal user input. Accordingly, methods such as those described in the present inventor's commonly assigned, copending United States Patent Application entitled Multi-size Control for Multiple Workspaces, the disclosure of Which is incorporated herein by reference as if set forth fully, may be utilized. Utilizing such methods, the resizing of one pane causes the automatic resizing of other panes within the window so as to maintain their non-overlapping relationship.

**Figures 7 and 8** are flowchart illustrations of methods, apparatus (systems) and computer program products according to the invention. It will be understood that each block of the flowchart illustrations, and combinations of blocks in the flowchart illustrations, can be implemented by computer program instructions. These computer program instructions may be loaded onto a computer or other programmable data processing apparatus to produce a machine, such that the instructions which execute on the computer or other programmable data processing apparatus create means for implementing the functions specified in the flowchart block or blocks. These computer program instructions may also be stored in a computer-readable memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instruction means which implement the function specified in the flowchart block or blocks. The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a

computer implemented process such that the instructions which execute on the computer or other programmable apparatus provide steps for implementing the functions specified in the flowchart block or blocks.

Accordingly, blocks of the flowchart illustrations support combinations of means for performing the specified functions, combinations of steps for performing the specified functions and program instruction means for performing the specified functions. It will also be understood that each block of the flowchart illustrations, and combinations of blocks in the flowchart illustrations, can be implemented by special purpose hardware-based computer systems which perform the specified functions or steps, or combinations of special purpose hardware and computer instructions.

As seen in **Figure 7**, a window is created with a plurality of panes **90**. User input is then received as reflected in block **91**. If the user input specified opening a new pane, then as seen in blocks **92** and **94**, a new set of panes is created incorporating the new pane and resizing the existing panes. If the user input specifies the closing or deactivation of a pane, then, as seen in blocks **96** and **98**, a new set of panes is created removing the pane to be closed and with the remaining panes resized to occupy substantially all of the workspace of the created window.

**Figure 8** illustrates the selection of a user selectable option by user input. When the user selects an icon, as reflected in block **100**, the contents of the pane containing that icon are replaced with the contents associated with that icon. This operation is reflected in block **102**. If there are no underlying layers for the pane, then a view stack does not exist for the pane and one is created, as reflected in blocks **104** and **106**. A stack item or view icon is then created and added to the view stack as seen in block **108**.

As used herein, the terms "open" and "close" when used with regard to a pane within a window refer to operations to make the contents of a pane visible or to hide the contents of a pane. Accordingly, any method known to those of skill in the art to hide a pane, such as minimizing, iconizing or closing a pane may be utilized. Furthermore, any method known to those of skill in the art of making a pane visible, such as creating a pane, opening a pane, or expanding from an iconized or minimized pane may be utilized in practicing the present invention.

## Claims

1. A user interface for a data processing system, the user interface comprising:
  - a window having a workspace;
  - a first set of non-overlapping resizeable panes comprising a plurality of non-overlapping resizeable panes within said workspace of said window wherein said non-overlapping resizeable

- ble panes occupy substantially the entirety of said workspace; and  
means responsive to a user input to open a new pane, for creating a second set of panes in said window, said second set of panes comprising said first set of panes and said new pane in non-overlapping relationship without requiring resizing of said new pane or said first set of panes by the user.
2. A user interface according to Claim 1, further comprising means responsive to a user input to close a selected one of said first set of panes, for creating a third set of panes comprising the non-selected panes of said first set of panes in non-overlapping relationship without requiring resizing of said non-selected panes of said first set of panes by the user and wherein said third set of panes occupy substantially the entirety of said workspace.
3. A user interface according to Claim 1 or 2, wherein said window comprises a first window, said user interface further comprising:
- means for creating a second window having a workspace;  
means responsive to user input for selecting one of said plurality of non-overlapping resizeable panes of said first set of panes; and  
means responsive to said means for creating a second window and said means for selecting for placing the contents which correspond to said selected one of said plurality of non-overlapping resizeable panes in said second window.
4. A user interface according to Claim 1, wherein said window comprises a first window, said user interface further comprising:
- means responsive to user input and associated with said plurality of non-overlapping resizeable panes for selecting one of said plurality of non-overlapping resizeable panes of said first set of panes;  
means responsive to user input and said selecting means for dragging said selected one of said plurality of non-overlapping resizeable panes to outside said first window; and  
means responsive to said means for selecting and said means for dragging for creating a second window having a workspace the contents of which correspond to said selected and dragged one of said plurality of non-overlapping resizeable panes.
5. A user interface according to any preceding Claim, wherein resizing of one of said plurality of resizeable panes of said first set of panes causes resizing of other of said resizeable panes.
6. A user interface for a data processing system, the user interface comprising:
- a window having a workspace;  
a plurality of non-overlapping resizeable panes within said workspace of said window; and  
selectable contents contained within at least one of said non-overlapping resizeable panes which includes at least one option icon of user selectable options and wherein selecting said at least one option icon causes the contents of said at least one of said non-overlapping resizeable panes to be replaced by contents associated with said selected option icon.
7. A user interface according to Claim 6, further comprising a view stack associated with one of said non-overlapping resizeable panes the contents of which has been replaced, said view stack having a view icon associated with the replaced contents of said associated non-overlapping resizeable pane and wherein selection of said view icon causes the contents of said associated non-overlapping resizeable pane to be replaced by the contents associated with said selected view icon.
8. A user interface according to Claim 6, wherein said window comprises a first window, said user interface further comprising:
- means for creating a second window having a workspace;  
means responsive to user input for selecting one of said plurality of non-overlapping resizeable panes; and  
means responsive to said means for creating a second window and said means for selecting for placing the contents which correspond to said selected one of said plurality of non-overlapping resizeable panes in said second window.
9. A user interface according to Claim 6, wherein said window comprises a first window, said user interface further comprising:
- means associated with said plurality of non-overlapping resizeable panes for selecting one of said plurality of non-overlapping resizeable panes;  
means associated with said selecting means for dragging said selected one of said plurality of non-overlapping resizeable panes to outside said first window; and  
means associated with said means for select-



ing and said means for dragging for creating a second window having a workspace the contents of which correspond to said selected and dragged one of said plurality of non-overlapping resizeable panes.

10. A user interface according to Claim 6, wherein said plurality of resizeable panes contain related information and wherein selection of the selectable contents of said at least one of said plurality of resizeable panes causes contents of one other of said plurality of resizeable panes to be revised.

11. A user interface according to Claim 6, wherein resizing of one of said plurality of resizeable panes causes resizing of other of said resizeable panes.

12. A computer-readable storage medium having computer-readable program code means embodied in said medium, said computer-readable program code means comprising:

computer readable program code means for providing a window having a workspace;  
computer readable program code means for providing a first set of non-overlapping resizeable panes comprising a plurality of non-overlapping resizeable panes within said workspace of said window wherein said non-overlapping resizeable panes occupy substantially the entirety of said workspace; and  
computer readable program code means responsive to a user input to open a new pane, for creating a second set of panes in said window, said second set of panes comprising said first set of panes and said new pane in non-overlapping relationship without requiring resizing of said new pane or said first set of panes by the user.

13. A method of providing a user interface for a data processing system, the method comprising the steps of:

providing a window having a workspace;  
providing a first set of non-overlapping resizeable panes comprising a plurality of non-overlapping resizeable panes within said workspace of said window wherein said non-overlapping resizeable panes occupy substantially the entirety of said workspace;  
obtaining user input indicating that a new pane is to be opened; and  
creating a second set of panes in said window based on said user input, said second set of panes comprising said first set of panes and said new pane in non-overlapping relationship without requiring resizing of said new pane or

said first set of panes by a user.

14. A method according to Claim 13, further comprising the steps of:

selecting one of said first set of panes to be closed; and  
creating a third set of panes comprising non-selected panes of said first set of panes in non-overlapping relationship without requiring resizing of said non-selected panes of said first set of panes by the user and wherein said third set of panes occupy substantially the entirety of said workspace.

15. A method according to Claim 13 or 14, wherein said window comprises a first window, said method further comprising the steps of:

creating a second window having a workspace;  
selecting one of said plurality of non-overlapping resizeable panes of the first set of panes; and  
placing the contents which correspond to said selected one of said plurality of non-overlapping resizeable panes in said second window.

16. A method according to Claim 13, wherein said window comprises a first window, said method further comprising the steps of:

selecting one of said plurality of non-overlapping resizeable panes of the first set of panes;  
obtaining user input indicating that said selected one of said plurality of non-overlapping resizeable panes has been dragged to outside said first window; and  
creating a second window having a workspace the contents of which correspond to said selected and dragged one of said plurality of non-overlapping resizeable panes.

17. A method according to Claim 13, 14, 15 or 16, further comprising the step of:

obtaining user input to resize of one of said plurality of resizeable panes of the first set of panes; then  
resizing other of said resizeable panes based on the obtained user input.

18. A method of providing a user interface for a data processing system, the method comprising the steps of:

providing a window having a workspace;  
providing a plurality of non-overlapping resizeable panes within said workspace of said win-



dow; and  
providing selectable contents contained within  
at least one of said non-overlapping resizeable  
panes which includes at least one option icon  
of user selectable options and wherein select- 5  
ing said at least one option icon causes the con-  
tents of said at least one of said non-overlap-  
ping resizeable panes to be replaced by con-  
tents associated with said selected option icon.

10

15

20

25

30

35

40

45

50

55



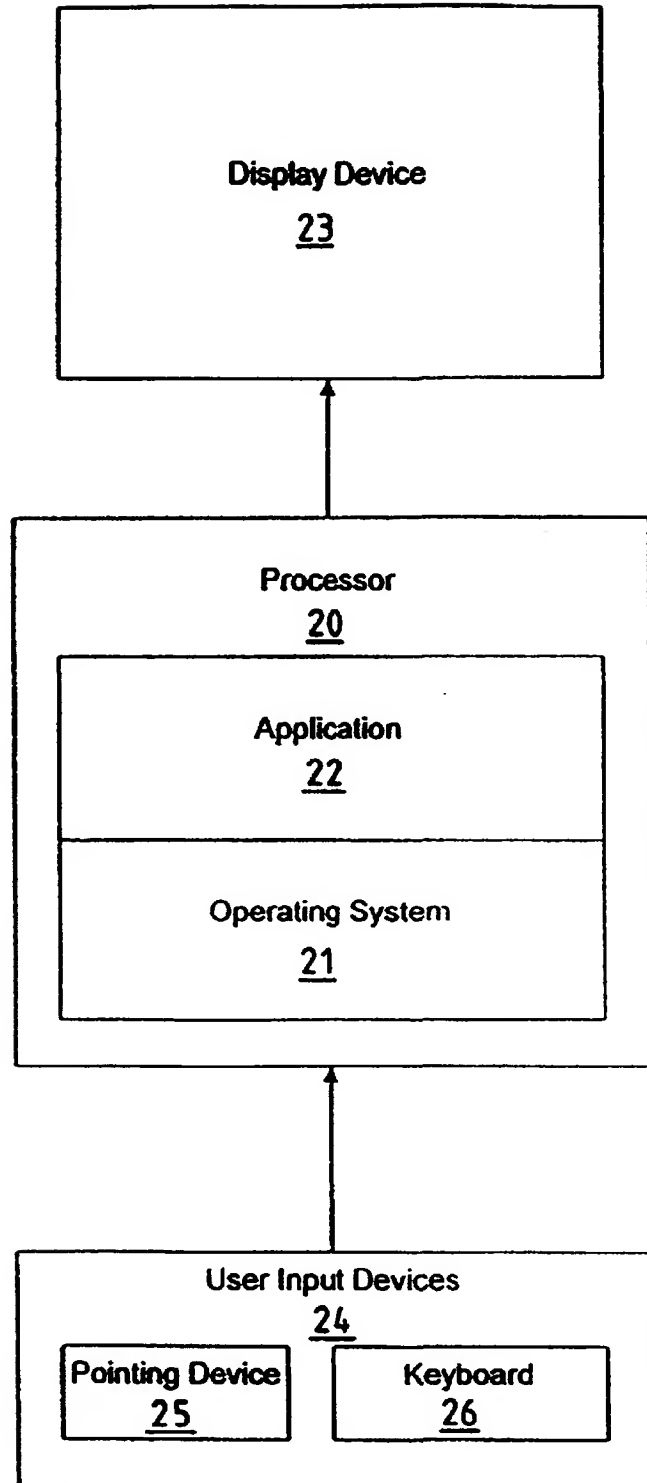


FIG. 1

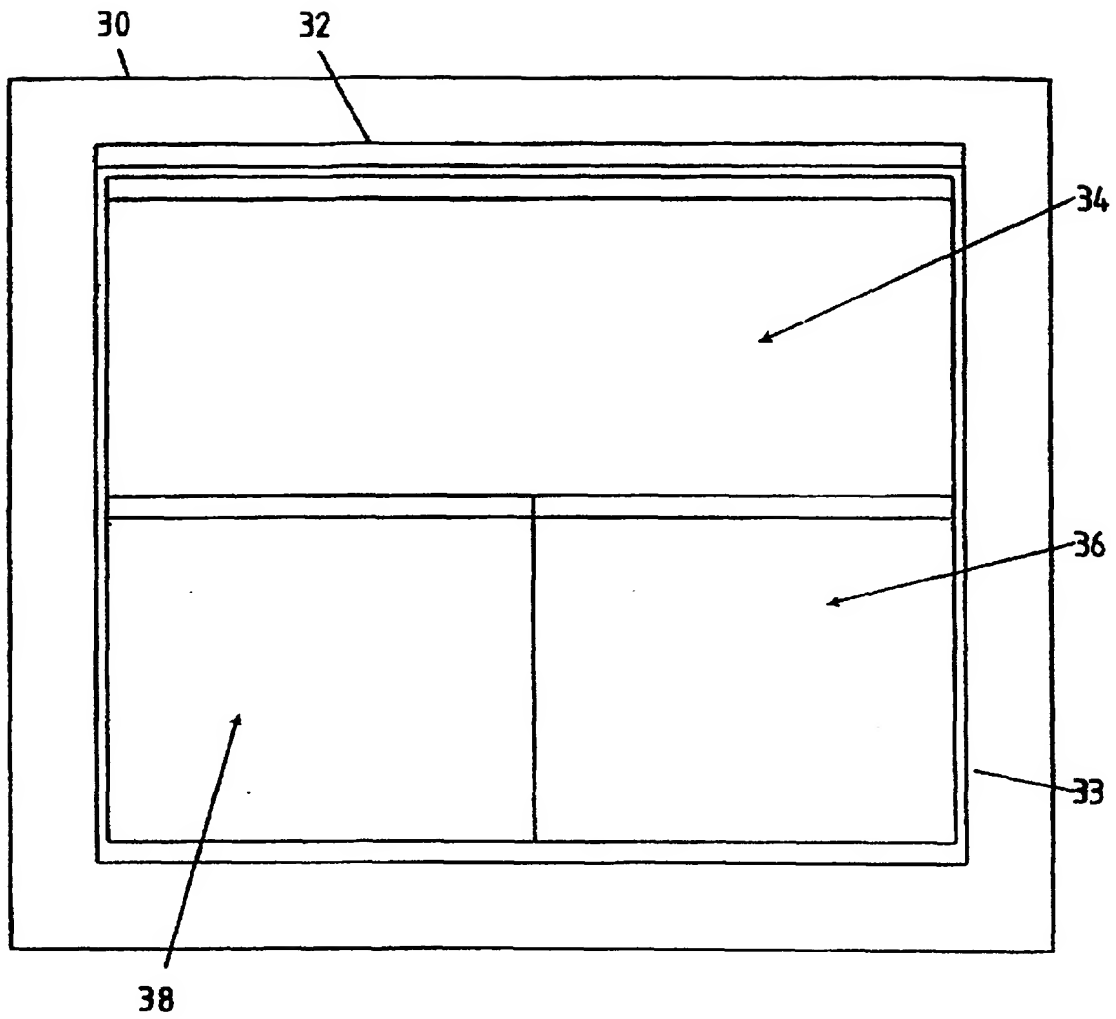

**FIG. 2**

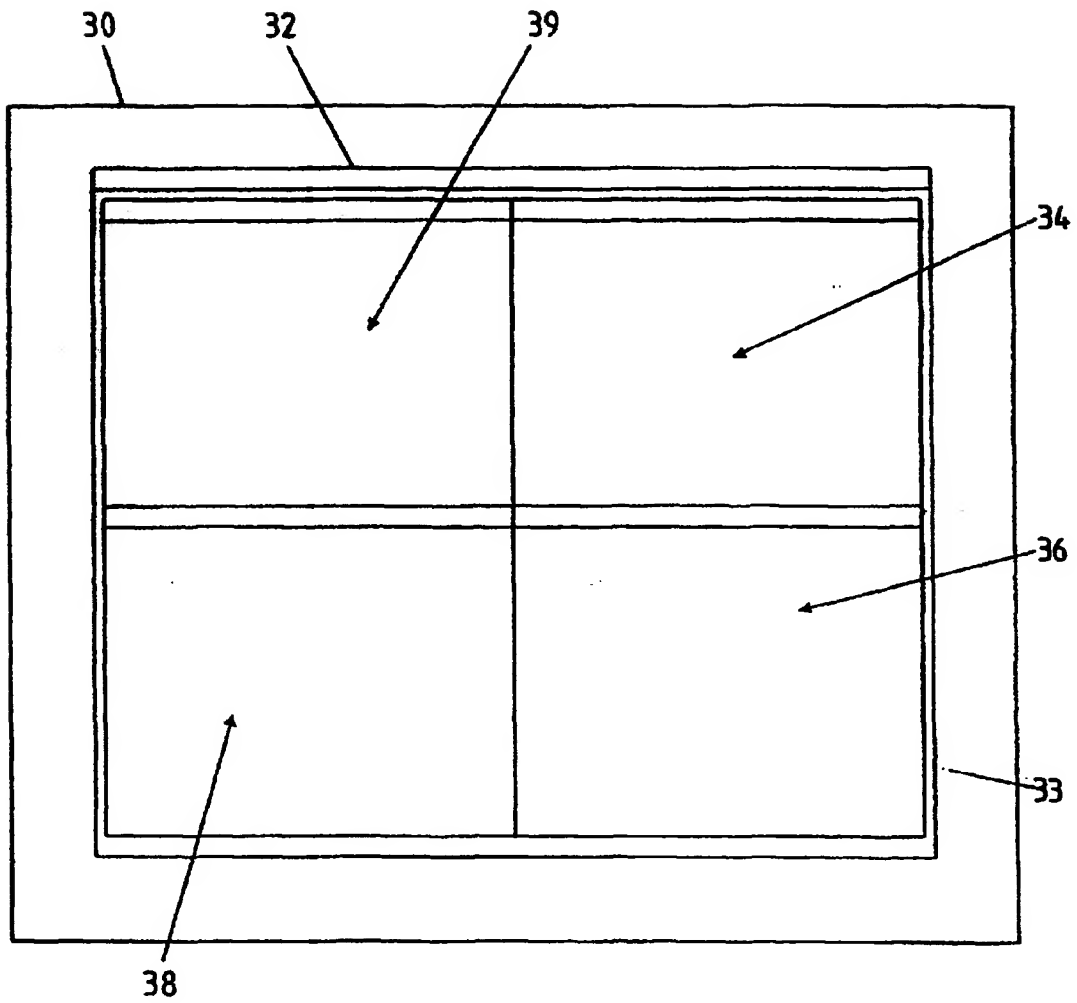

**FIG. 3**



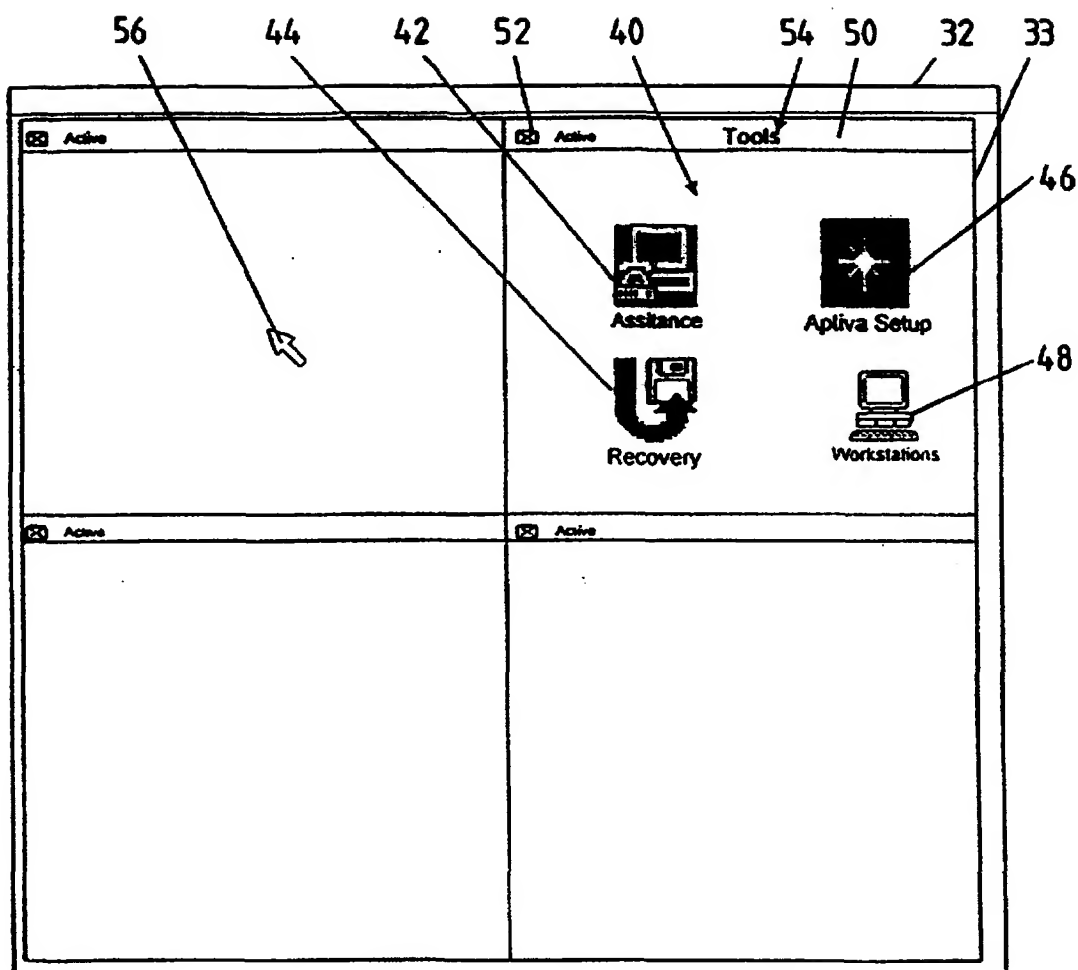


FIG. 4

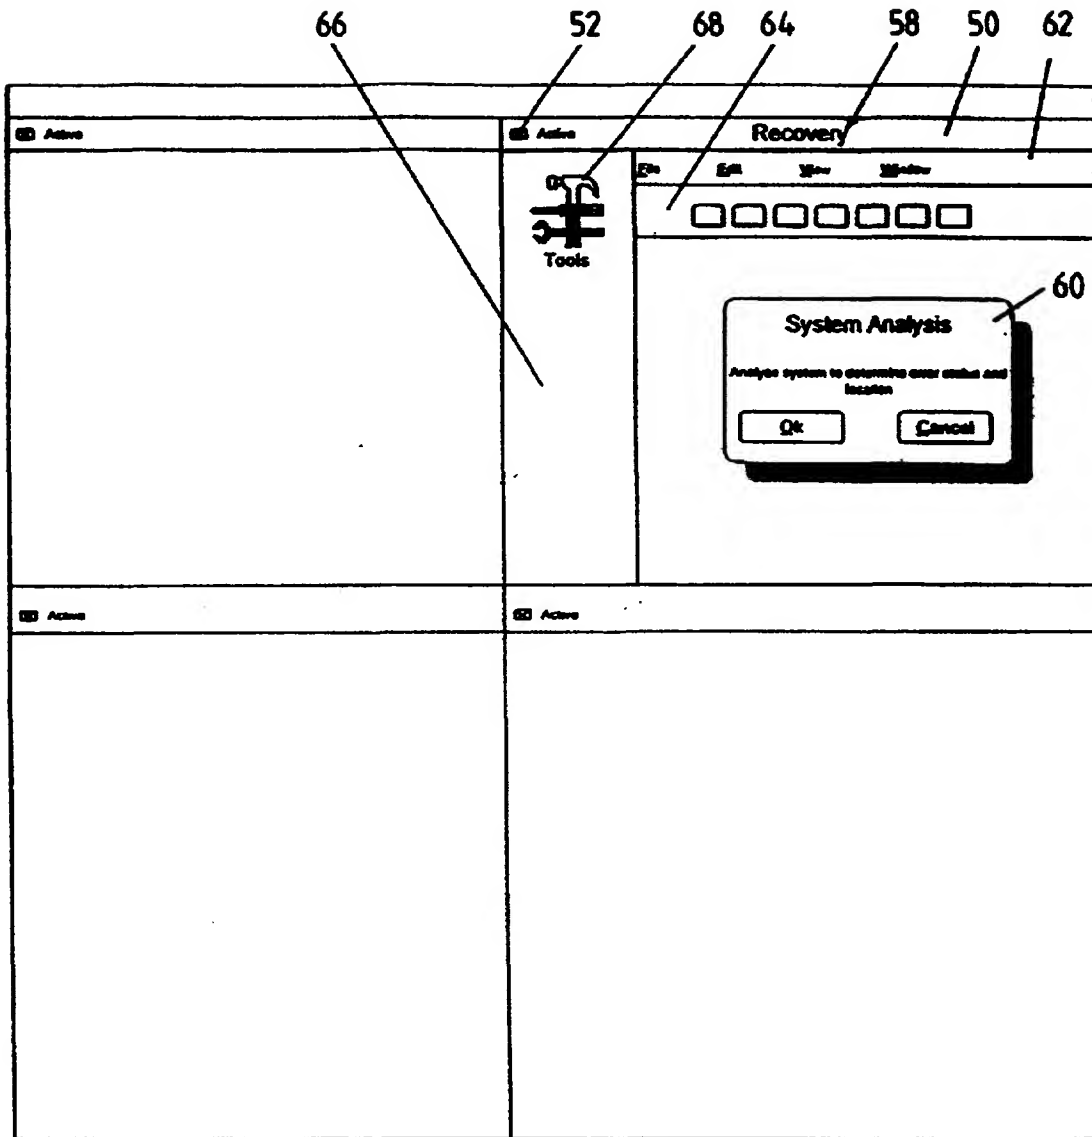



**FIG. 5**

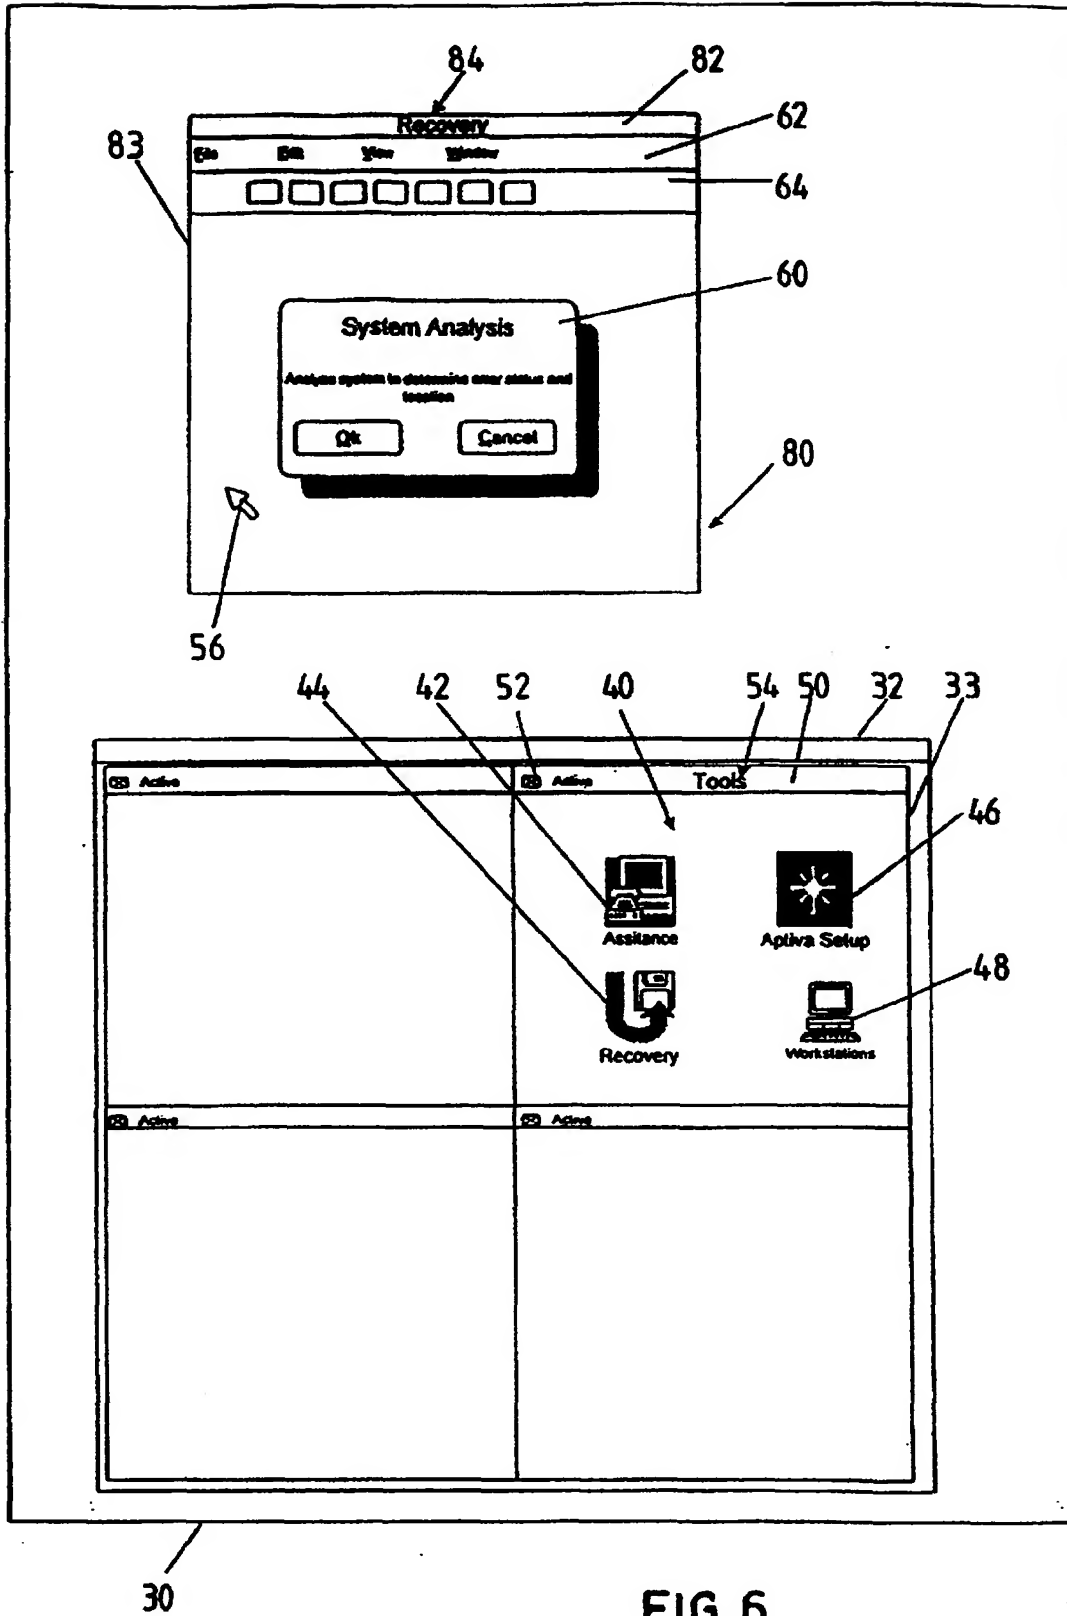

**FIG. 6**

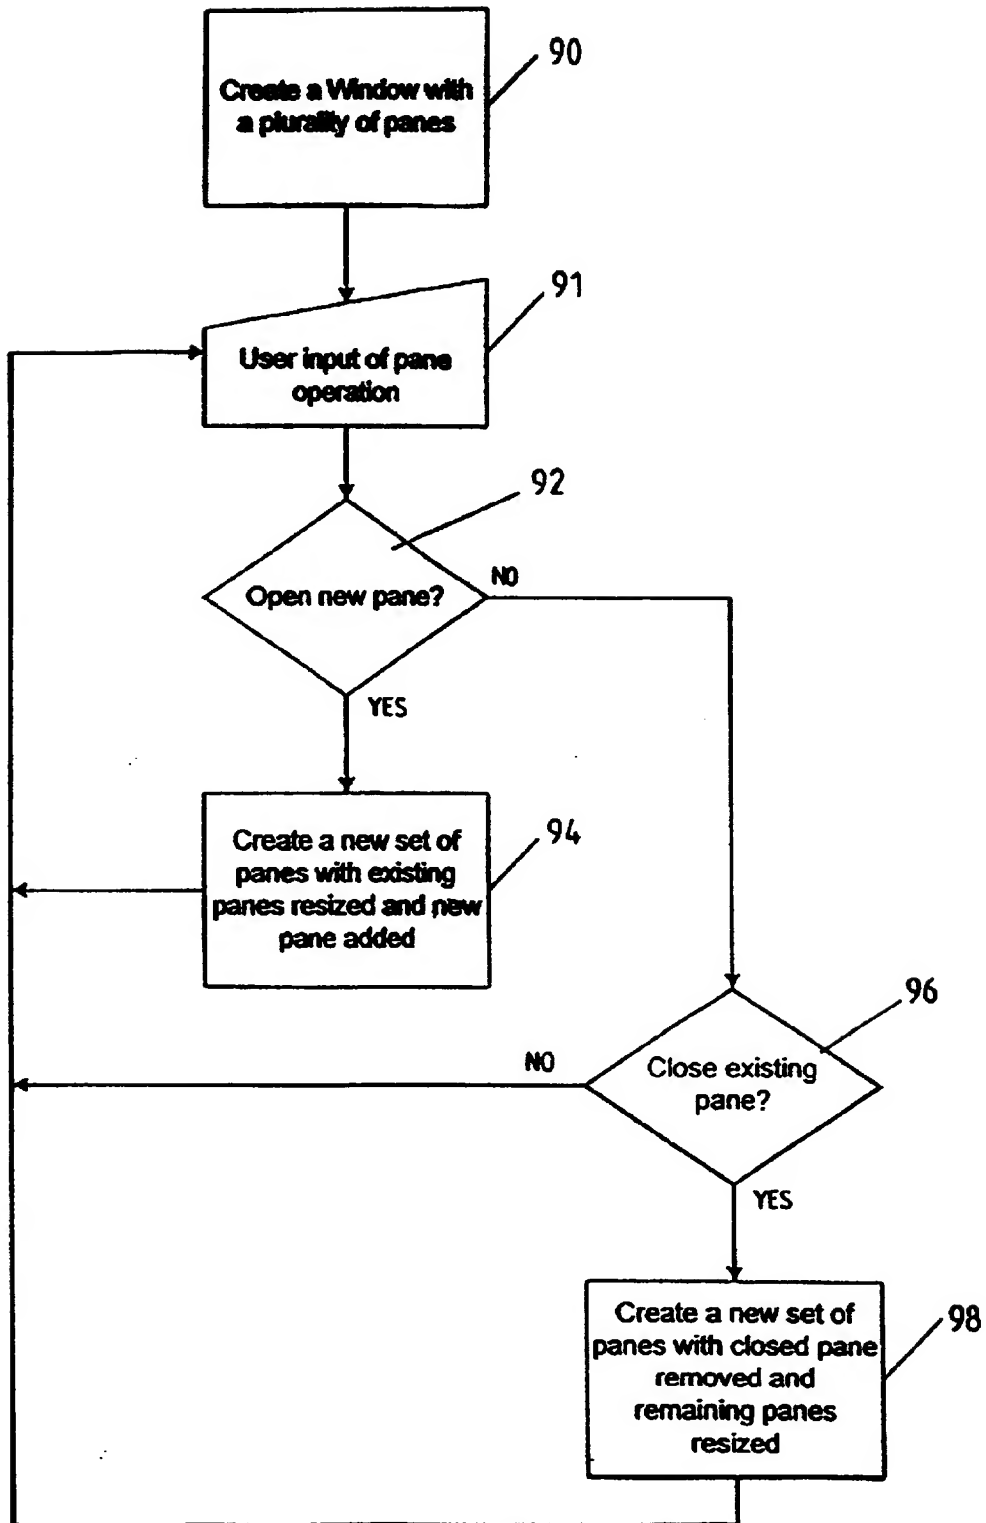

**FIG. 7**

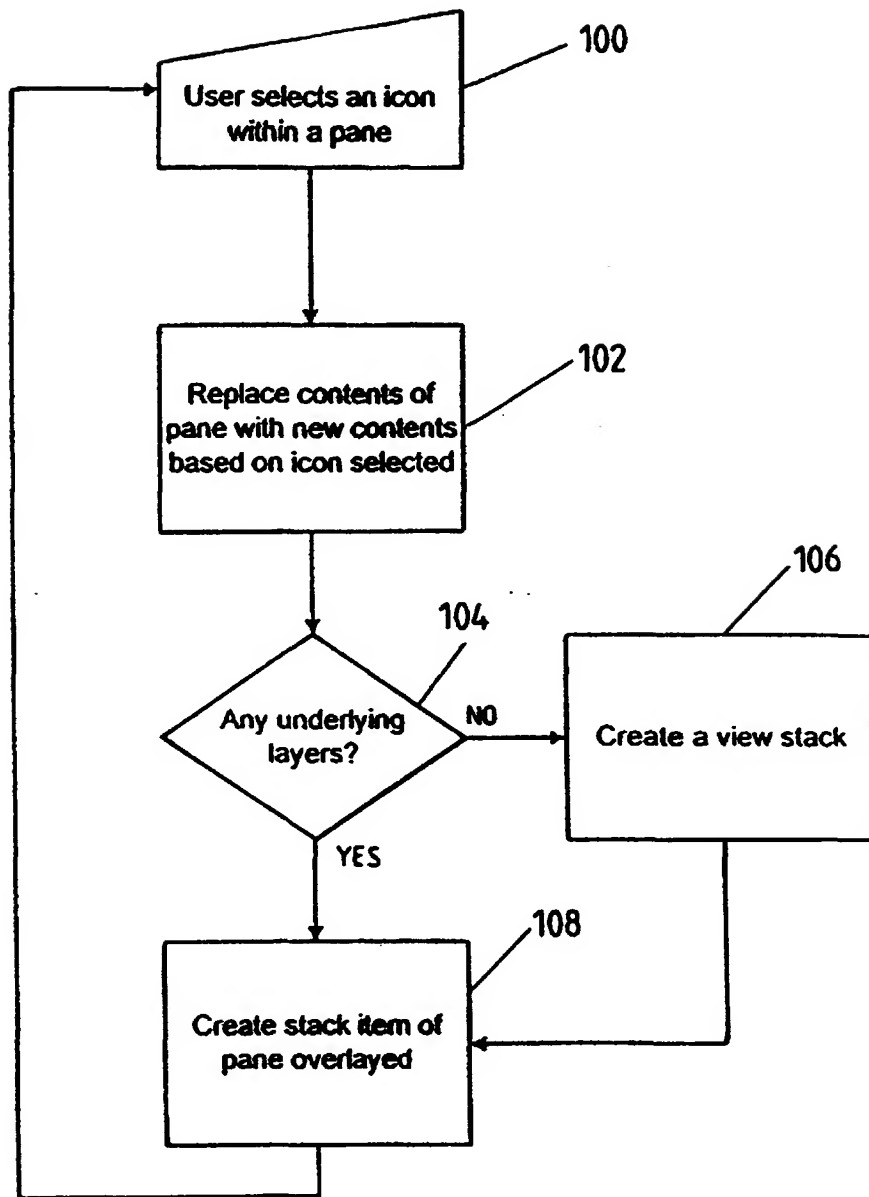**FIG. 8**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 97 30 4748

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	WO 94 24657 A (APPLE COMPUTER) 27 October 1994 * page 6, line 16 - page 7, line 17 * * page 10, paragraph 2 * * page 11, paragraph 2 * * figures 1-10D *	1-18	G06F3/033
X	--- "AUTOMATIC TILING OF ARBITRARY OBJECTS" RESEARCH DISCLOSURE, no. 344, 1 December 1992, page 943 XP000327169 * the whole document *	1,13	
A	--- EP 0 572 205 A (IBM) 1 December 1993 * column 4, line 45 - column 5, line 8 *	7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G06F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 September 1997	Examiner Ciarelli, N
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPD FORM 1503 03/92 (P04C01)